



Beacon LED Tower

The Lind Equipment **Award Winning** Beacon LED Tower brings you all the light you've come to expect from traditional 4x1000W metal halide light towers, but in a completely unexpected package. **Compact**, **lightweight**, **and truly man-portable**, the Beacon LED Tower can be transported with ease without any compromise in durability and stability.

The Beacon LED Tower uses **direct drive high-efficiency LED lights** and runs whisper-quiet on any power source you choose: external, a user supplied generator or a fuel tank. **Operating costs of as little as \$0.10 / hour** and with state-of-the-art robust LED lighting - the tower is virtually maintenance free.

A Beacon LED Tower can be lifted into the back of a pick-up truck, and two towers can fit in the truck bed for easy transportation. The steel frame chassis and mast are robust enough to withstand any job site condition. The Beacon LED Tower can be purchased in a **extended mast version**, boasting a maximum height of 20 feet.





For more information about the Beacon LED Tower: www.BeaconLEDTower.com

vs www.lindequipment.net | info@lindequipment.net | T: 877.475.LIND





Beacon LED Tower

| SPECIFICATIONS | | LE980LEDV-T2 | LE980LEDV-T4 | LE980LEDVEM-T4 |
|--------------------------|---------------------|--|-----------------------------|--------------------------------------|
| Description of the Tower | | Two-light Vertical Mast | Four-light Vertical Mast | Four-light Extended Vertical Mast |
| Colour Choice | | Add '-B' for the black colour model, add nothing for yellow | | |
| Lights | Power | 400W | 800W | 800W |
| | Amperage | 3.3 Amps @120V | 6.7 Amps @120V | 6.7 Amps @120V |
| | Lumens | 60,000 | 120,000 | 120,000 |
| | Voltage | 90V-277V | | |
| | Ingress protection | IP65 Weatherproof | | |
| | Construction | Aluminum housing, polycarbonate lenses Over 50,000 cETLus/IP65 | | te lenses |
| | Rated hours | | | |
| | Approvals | | | |
| Mast | Max height | 16' (from the ground) | | 20' (from the ground) |
| | Construction | Steel | | |
| | Wind resistance | 45 mph | | |
| Chassis | Construction | Steel frame | | |
| | Outriggers | Outriggers extend to 2' beyond frame | | |
| | Tires | Foam-filled rubber tires | | Solid rubber tires |
| | Features | Caster wheels • Side access forklift guides | | ft guides |
| | Dimensions (stowed) | L: 52" • W: 49"(34" fully in) • H: 83" | | : 83" |
| | Weight | 350 lbs | 380 lbs | 520lbs |
| Cabinet | Construction | Steel | | |
| | Internal dimensions | L: 27" • W: 21" • H: 19.5" | | |
| | Features | Lockable • Ventilated • On/off switch • Daisy-chain outlet | | |
| Fuel Tank | Dimensions | L: 19.3" • W: 12.2" • H: 10.2" | | |
| | Capacity | 6 Gallons • 23 Litres | | |
| | Features | Comes complete with hose and fuel cap that will fit most por case generator models. Alternative cap sizes available - construction Removable auxiliary tank | | |
| | Run time | Approx 45 hours on standard 2000W suitcase generator with auxiliary fue tank | | nerator with auxiliary fuel |
| Generator | Units do not come s | Units do not come standard with a suitcase generator. Lind can also supply for additional cost. | | |



For more information about the Beacon LED Tower: www.BeaconLEDTower.com



www.lindequipment.net | info@lindequipment.net | T: 877.475.LIND





Beacon LED Tower on a Trailer

The Lind Equipment **Award Winning** Beacon LED Tower can also be purchased with an compact, lightweight trailer for a tow behind option.

To order your Beacon LED Tower with the Trailer just substitut e -T4 to -TRAILER.

* Made in Canada



| SPECIFICATIONS | | | | |
|--------------------|-------------------------|--|--|--|
| Mast height | 17'9" | | | |
| Construction | Steel frame | | | |
| Tires | 15" Trailer Tires | | | |
| Trailer dimensions | L: 6'8" • W: 4'• H: 18" | | | |
| Total weight | 713 lbs | | | |
| Hitch | 2"ball | | | |





For more information about the Beacon LED Tower: www.BeaconLEDTower.com

www.lindequipment.net | info@lindequipment.net | T: 877.475.LIND






Beacon LED Solar Tower

The Lind Equipment Beacon LED Solar Light Tower uses the incredibly bright 4x150W **direct drive highefficiency LED lights** that were adapted from the **Award Winning** Beacon LED Tower. Once again we take the design to the next level to make the most **bright**, **compact**, **and truly man-portable** solar light tower available in the market.

Thanks to its user-friendly design, it operates seamlessly without requiring inputs like labor, maintenance, or fuel. Built to perform all year round, even in the toughest environments. Automatically controlled by the pre-installed DuskDawn sensor, the solar-powered Beacon LED Tower will save you time and money while drastically reducing your carbon emissions.

Unmatched power efficiency guarantees extended operational time, providing the brightest illumination with minimal energy consumption. The Beacon LED Solar Light Tower can be purchased as a man-portable four-wheeled cart or as a compact, lightweight tow-behind trailer.

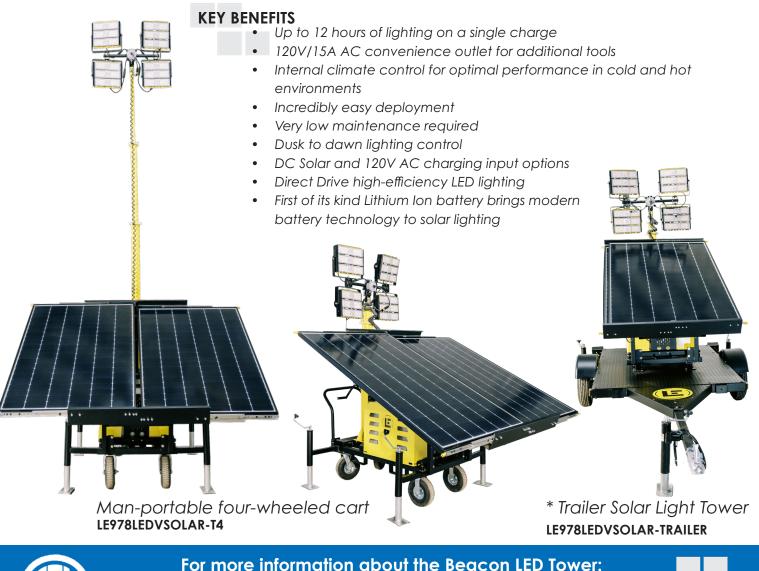



www.BeaconLEDTower.com www.lindequipment.net | info@lindequipment.net | T: 877.475.LIND





Beacon LED Solar Tower

| SPECIFICATIONS | | LE978LEDVSOLAR-T4 | LE978LEDVSOLAR-TRAILER | |
|--------------------------|--------------------------------------|---|--|--|
| Description of the Tower | | Four-light Vertical Mast Solar powered | | |
| Colour Choice | | Add '-B' for the black colour model, add nothing for yellow | | |
| Lights | Power | 600W | | |
| | Amperage | 1.25 Amps @120V | | |
| | Lumens | 90,000 | | |
| | Voltage | 90V-277V | | |
| | Ingress protection | IP65 Weatherproof | | |
| | Construction | Aluminum housing, polycarbonate lenses | | |
| Rated hours | | Over 50,000 | | |
| | Approvals | cETLus/IP65 | | |
| Mast | Max height | 16' (from the ground) | | |
| | Construction | Steel | | |
| | Wind resistance | 45 mph | | |
| Chassis | Construction | Steel frame | | |
| | Outriggers | Outriggers extend to 2' beyond frame | | |
| | Tires | Solid rubber tires | 15" Trailer Tires | |
| | Features | Caster wheels • Side access forklift guides | Towable with 2" ball • Removable from Trailer | |
| | Dimensions (stowed) | L: 83" • W: 83"(44" closed) • H: 90" | L: 134" • W: 83"(66" closed) • H: 104" | |
| | Weight | 852 lbs | 1191 lbs | |
| Cabinet | Construction | Steel | | |
| | Internal dimensions | L: 27" • W: 21" • H: 19.5" | | |
| | Features | Lockable • Ventilated • On/off switch | | |
| Battery | 7.2kWh battery pack | | | |
| Solar Panel | 2 x 535W of retractable solar panels | | | |

* Made in Canada



For more information about the Beacon LED Tower: www.BeaconLEDTower.com



www.lindequipment.net | info@lindequipment.net | T: 877.475.LIND