

# Beacon LED Solar Tower


The Lind Equipment Beacon LED Solar Light Tower uses the incredibly bright 4x150W **direct drive high-efficiency LED lights** that were adapted from the **Award Winning** Beacon LED Tower. Once again we take the design to the next level to make the most **bright, compact, and truly man-portable** solar light tower available in the market.

Thanks to its user-friendly design, it operates seamlessly without requiring inputs like labor, maintenance, or fuel. Built to perform all year round, even in the toughest environments. Automatically controlled by the pre-installed DuskDawn sensor, the solar-powered Beacon LED Tower will save you time and money while drastically reducing your carbon emissions.

Unmatched power efficiency guarantees extended operational time, providing the brightest illumination with minimal energy consumption. The Beacon LED Solar Light Tower can be purchased as a man-portable four-wheeled cart or as a compact, lightweight tow-behind trailer.

### KEY BENEFITS

- Up to 12 hours of lighting on a single charge
- 120V/15A AC convenience outlet for additional tools
- Internal climate control for optimal performance in cold and hot environments
- Incredibly easy deployment
- Very low maintenance required
- Dusk to dawn lighting control
- DC Solar and 120V AC charging input options
- Direct Drive high-efficiency LED lighting
- First of its kind Lithium Ion battery brings modern battery technology to solar lighting

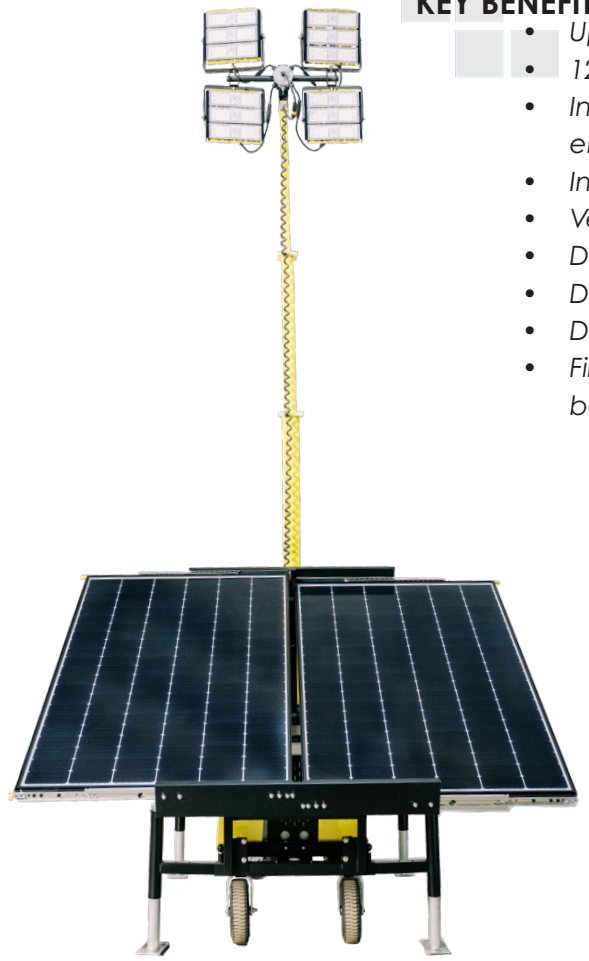

Man-portable four-wheeled cart  
**LE978LEDVSOLAR-T4**



\* Trailer Solar Light Tower  
**LE978LEDVSOLAR-TRAILER**



# Beacon LED Solar Tower

SPECIFICATIONS		LE978LEDVSOLAR-T4	LE978LEDVSOLAR-TRAILER
<b>Description of the Tower</b>		Four-light Vertical Mast Solar powered	
<b>Colour Choice</b>		Add '-B' for the black colour model, add nothing for yellow	
<b>Lights</b>	Power	600W	
	Amperage	1.25 Amps @120V	
	Lumens	90,000	
	Voltage	90V-277V	
	Ingress protection	IP65 Weatherproof	
	Construction	Aluminum housing, polycarbonate lenses	
	Rated hours	Over 50,000	
	Approvals	cETLus/IP65	
<b>Mast</b>	Max height	16' (from the ground)	
	Construction	Steel	
	Wind resistance	45 mph	
<b>Chassis</b>	Construction	Steel frame	
	Outriggers	Outriggers extend to 2' beyond frame	
	Tires	Solid rubber tires	15" Trailer Tires
	Features	Caster wheels • Side access forklift guides	Towable with 2" ball • Removable from Trailer
	Dimensions (stowed)	L: 83" • W: 83"(44" closed) • H: 90"	L: 134" • W: 83"(66" closed) • H: 104"
	Weight	852 lbs	1191 lbs
<b>Cabinet</b>	Construction	Steel	
	Internal dimensions	L: 27" • W: 21" • H: 19.5"	
	Features	Lockable • Ventilated • On/off switch	
<b>Battery</b>	7.2kWh battery pack		
<b>Solar Panel</b>	2 x 535W of retractable solar panels		

\* Made in Canada

